

E50

UNDERCOUNTER DISHWASHER



PERFORMANCE AT A GLANCE

500 x 500

RACK SIZE (MM)

2.2 L

WATER / CYCLE

**90-120s;
120/180s**

ADJUSTABLE CYCLES

30-55

RACKS / HOUR

INTEGRATED PUMPS

Detergent + rinse-aid dosing

Drain pump included



WASHING PERFORMANCE

Rack dimensions	500 x 500 mm
Useful washing height	350 mm
Wash cycle duration	90 / 120 s or 120/ 180 s
Nominal productivity	30-55 racks/h*

PUMPS AND WATER SYSTEM

Wash pump	550 W
Rinse pump	100 W
Drain pump	Included
Water consumption	2.0-2.4 L/cycle
Boiler capacity	7.0 L
Tank capacity	18L

HEATING AND ELECTRICAL

Boiler heating element	2.7 kW (standard) / 4.0 kW (optional)
Tank heating element	2.0 kW
Electrical supply	230 V / 50 Hz/1 Phase
Absorbed current	14amp or 20 amp

CONNECTIONS

Water inlet	G 3/4" or G 1/2"
Water inlet hose	1.5 m
Power cord	3.0 m
Overall dimensions (W x D x H)	622 x 620 x 810 mm

OVERALL DIMENSIONS

All dimensions are shown in millimetres unless otherwise stated.

WIDTH




622 mm

DEPTH

620 mm

HEIGHT

810 mm

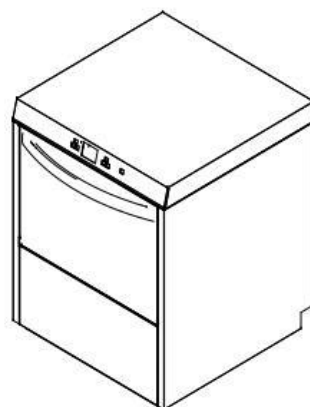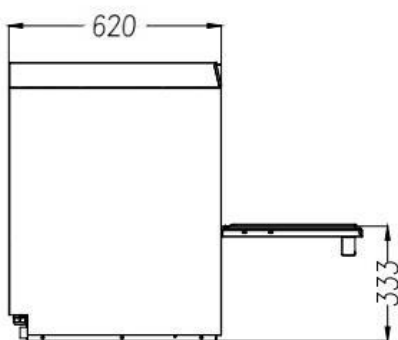

INSTALLATION CONNECTIONS

Water inlet connection

G 3/4" or G 1/2"

Water inlet hose length

1.5 m

Electrical supply

230 V / 50 Hz/1Phase

Power cord length

3.0 m

INSTALLATION NOTE

Allow adequate service clearance and install the unit in accordance with local electrical and plumbing regulations.